



Product features:

- Metal construction throughout
- Thermostatic valve for safety & comfort
- Zen inspired contemporary design
- 5 year limited warranty
- Self cancelling diverter included for maximum flexibility


Packaged properties:

Box length (mm): 360 Box depth(mm): 190
Box width(mm): 240 Boxed weight (Kg): 4.1

Includes pop up waste?: No


Additional comments:

Product dimensions:

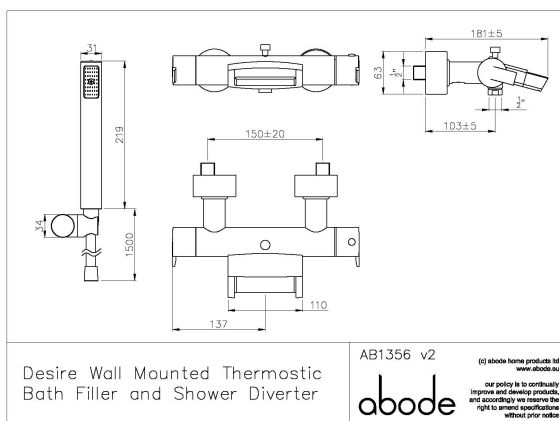

- Product mounted where: Wall
- Recommended hole size: 35 mm
- Overall Height / projection: 63 mm
- Exit reach: 185 ± 5 mm
- Exit height: 63 mm
- Base size: 150 ± 20 mm
- Inlet centre distance(s): 60 mm
- Min. fitting depth required: 60 mm
- Max. surface depth:

Product flow characteristics:

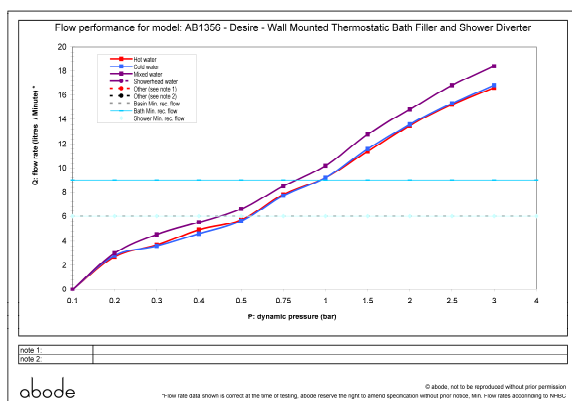

- Min / Max water pressure (bar): 1.00* / 5.00
*Detailed minimum pressure requirements for this product: Bath 1, Shower 0.5 (bar)
- Part G max. mixed flow rate at 3 bar (l/m): bath=18.4, shower=TBC
- Inlet connection type / length: Eccentric / mm
- Inlet (plumbing connection) / outlet size: 1/2" M / 3/4" M
- Product flow characteristics:
Non return valve(s) supplied or position: h&c inlet & shower output
- Aerator type:
- Control valve type: Thermostatic ()
- Includes output diverter?: Yes
- Inlet meshed particle filters included: 0.60 mm
- Shower hose type / length: Smoothflex / 1.50 m

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives