

#### Product features:

- Metal & ABS construction
- Thermostatic valve for safety & comfort
- 2 exit alternate control for output to 2 x shower or 1 x shower & 1 x bath
- Minimalist planate design form
- 5 year limited warranty


#### Packaged properties:

Box length (mm): 250      Box depth(mm): 150  
Box width(mm): 160      Boxed weight (Kg): 3.3

Includes pop up waste?: No

Additional comments:


#### Product dimensions:

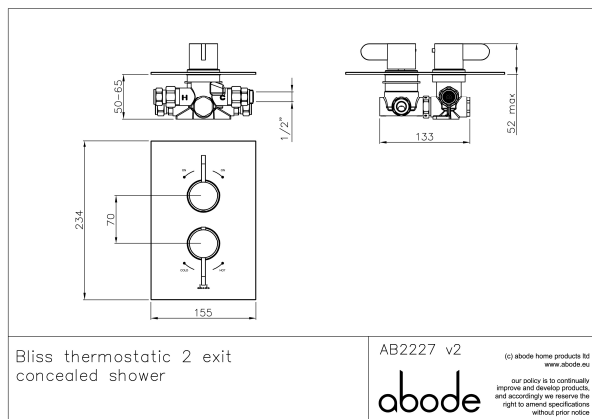

- Product mounted where: Wall
- Recommended hole size: 200 x 170 mm
- Overall Height / projection: 52 mm
- Exit reach: N/A mm
- Exit height: N/A mm
- Base size: 155 x 234 mm
- Inlet centre distance(s): N/A mm

- Min. fitting depth required: 50-65 mm
- Max. surface depth: N/A mm

#### Product flow characteristics:

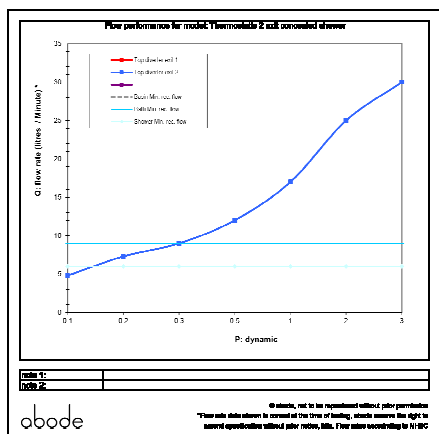

- Min / Max water pressure (bar): 0.30\* / 5.00
- Part G max. mixed flow rate at 3 bar (l/m): 30
- Inlet connection type / length: Fixed / N/A mm
- Inlet (plumbing connection) / outlet size: 1/2" M / 1/2" M
- Product flow characteristics: N/A
- Non return valve(s) supplied or position: h&c inlet
- Aerator type: N/A
- Control valve type: Thermostatic (new plastic type)
- Includes output diverter?: Yes
- Inlet meshed particle filters included: 0.6 (3/4" gasket)
- Shower hose type / length: N/A / N/A

#### Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

#### Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives