

Product Finish: Antique bronze

Product code: AT1164
EAN13 barcode: 5060048381795



Product features:


- Patented design adds filtered water to any kitchen tap
- Complete with flexi hoses & pushfits for easy installation
- Metal construction throughout
- Fixing kit designed for thicker surface depths
- Can be installed in any standard 35mm tap hole

Additional information / Parts included:

Normal cold water flow reduced by apx. 20% to conserve water usage

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product dimensions:

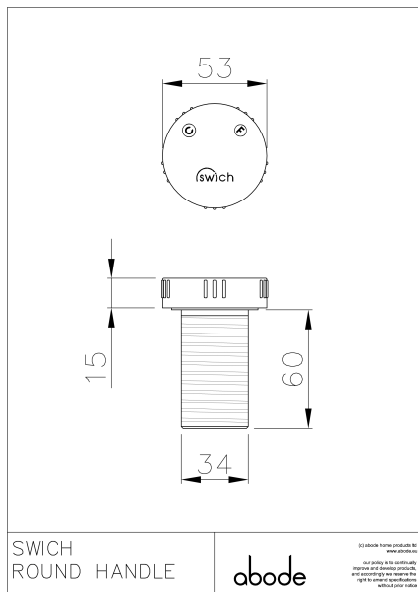

- Overall Height / projection: 15 mm
- Exit reach: n/a mm
- Exit height: n/a mm
- Centre distance(s):

- Base diameter(s): 53 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 50 mm

- Spout diameter: n/a mm
- Spout aerator size: n/a

Packaged properties:

- | | |
|-------------------------|----------------------|
| Box length: 420mm | Box depth: 75mm |
| Box width: 240mm | Units per outer: 5 |
| Tap only weight: 0.42kg | Boxed weight: 1.42kg |

Product flow characteristics:

Flow graph not available

- Min / Max water pressure: 1.00 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): n/a
- Control valve type: Ceramic disc QT
- Product flow characteristics: N/a
- Non return valve(s): No, if required use from existing tap installed
- Aerator type: N/a
- Accepts revolve / spray areator: No
- Spout connection method: N/a
- Tail pipe inlet / outlet size: M10 / 1/2" BSP Female
- Inlet pipe type / length: flexible stainless braided hose / 745 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year