

Product Finish: Brushed nickel

Product code: AT1166  
EAN13 barcode: 5060048381818



**Product features:**


- Patented design adds filtered water to any kitchen tap
- Complete with flexi hoses & pushfits for easy installation
- Metal construction throughout
- Fixing kit designed for thicker surface depths
- Can be installed in any standard 35mm tap hole

**Additional information / Parts included:**

Normal cold water flow reduced by apx. 20% to conserve water usage

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

**Product dimensions:**

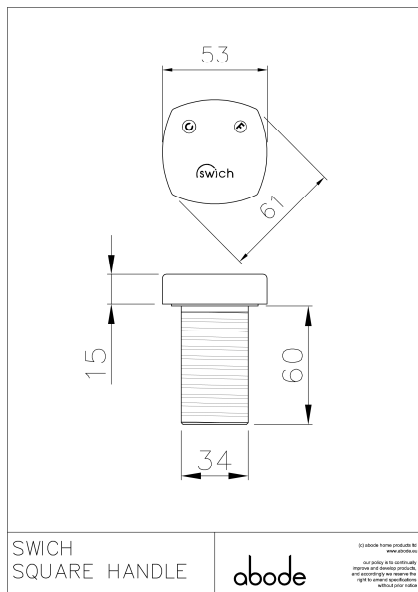

- **Overall Height / projection:** 15 mm
- **Exit reach:** n/a mm
- **Exit height:** n/a mm
- **Centre distance(s):**

- **Base diameter(s):** 61 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 50 mm

- **Spout diameter:** n/a mm
- **Spout aerator size:** n/a

**Packaged properties:**

- |                                |                             |
|--------------------------------|-----------------------------|
| <b>Box length:</b> 420mm       | <b>Box depth:</b> 75mm      |
| <b>Box width:</b> 240mm        | <b>Units per outer:</b> 5   |
| <b>Tap only weight:</b> 0.42kg | <b>Boxed weight:</b> 1.42kg |

**Product flow characteristics:**

Flow graph not available

- **Min / Max water pressure:** 1.00 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** n/a
- **Control valve type:** Ceramic disc QT
- **Product flow characteristics:** N/a
- **Non return valve(s):** No, if required use from existing tap installed
- **Aerator type:** N/a
- **Accepts revolve / spray areator:** No
- **Spout connection method:** N/a
- **Tail pipe inlet / outlet size:** M10 / 1/2" BSP Female
- **Inlet pipe type / length:** flexible stainless braided hose / 745 mm

**Care instructions summary:**

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

**Warranty Summary (Full details available on request):**

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year