


Hendon Side Spray

abode

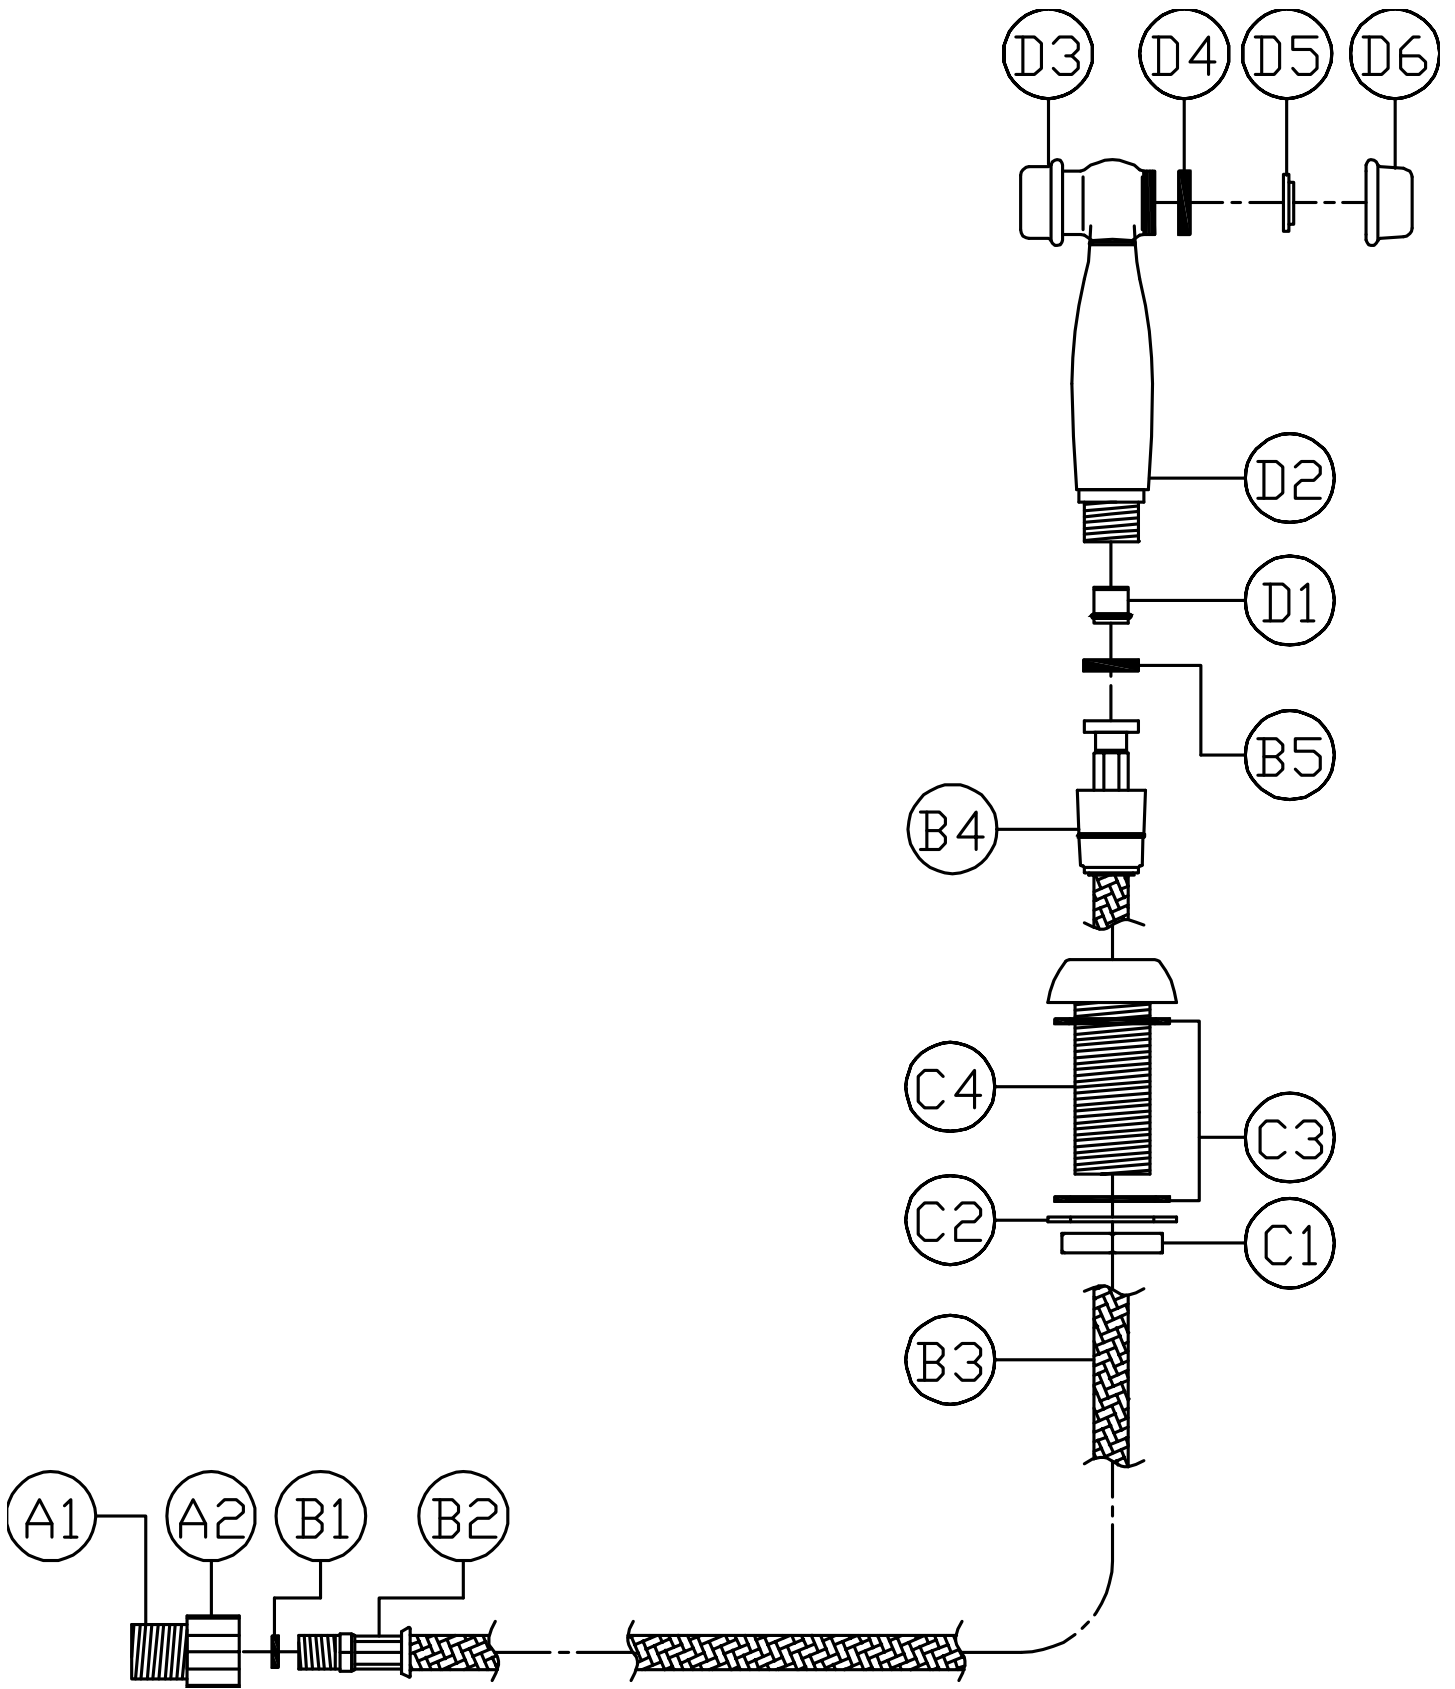

Hendon Side Spray

abode

General Advice:

- These instructions are intended as a guide only, if you are in any doubt you should seek the advice of a qualified professional.
- Take care not to mark finished parts with screwdrivers or other tools.
- Use a pair of rubber gloves to get a better grip on decorative hand tight parts.
- Ensure all parts are reassembled tightly.
- After maintenance test that all assemblies are water tight and function correctly.
- Always isolate the hot and cold water supplies before starting any maintenance, once isolated you should drain any residual water from your system.

To replace the sprayhead seal:

1. Unscrew nozzle cover (D6).
2. Remove spray diffuser (D5). Note the orientation of this part.
3. Remove nozzle seal (D4).
4. Replace nozzle seal (D4) and reassemble sprayhead in reverse order.

To replace the hose seals:

1. Unscrew ½" hose connection (B4) from sprayhead body (D2).
2. Remove and replace sprayhead seal (B5).
3. Unscrew M15 hose connection (B2) from the adaptor nut (A2).
4. Remove and replace adaptor nut seal (B1).
5. Reassemble in reverse order.