



### Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Luscious European quality chromium plate finish
- Supplied complete with flexible tail pipes for fast simple fitting
- A modern design classic style


### Packaged properties:

**Box length:** 255 mm      **Box depth:** 95 mm  
**Box width:** 200 mm      **Boxed weight:** 2.16 kg

**Includes pop up waste?:** Yes


**Additional comments:**

### Product dimensions:

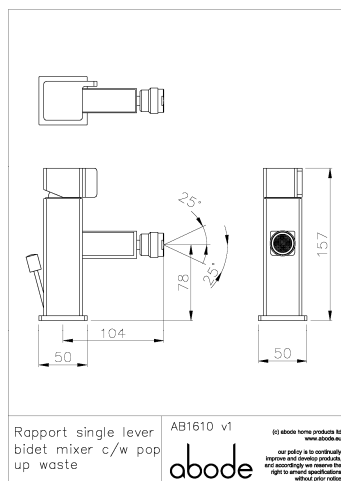

- **Overall Height / projection:** 157 mm
- **Exit reach:** 104 mm
- **Exit height:** 78 mm
- **Centre distance(s):** n/a mm
- **Base diameter(s):** 50 mm
- **Product mounted where:** Surface
- **Recommended hole diameter:** 35 mm
- **Min. fitting depth required:** n/a mm
- **Max. surface depth:** 37 mm

### Product flow characteristics:

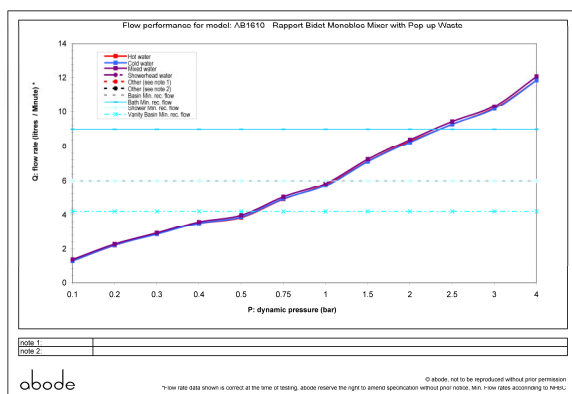

- **Min / Max water pressure:** 0.6 / 5.5 bar
- **Part G mixed flow rate at 3 bar (l/m):** 13.97

- **Max water temperature:** 70° C
- **Product flow characteristics:** Single flow
- **Aerator type:** Neoperl honeycomb std, laminar, pink screen
- **Includes output diverter?:** N/A
- **Control valve type:** Single lever (35mm)
- **Non return valve position:** n/a
- **Mesh particle filter size:** n/a
- **Inlet / outlet size:** 1/2" F / M10
- **Inlet type / length:** Flexi / 355mm & 350mm mm
- **Shower hose type / length:** N/a / n/a

### Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

### Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives