

Deck Mounted 3TH Basin Mixer






Product features:

- Metal construction throughout
- Custom designed for lower range pressures
- Quarter turn handle action for precise flow control
- · Fixed spout to prevent accidental water damage
- Minimalist planate design form

Packaged properties:

Box length: 410 mm Box depth: 110 mm Box width: 280 mm Boxed weight: 2.90 kg Includes pop up waste?: No **Additional comments:**

Product dimensions:

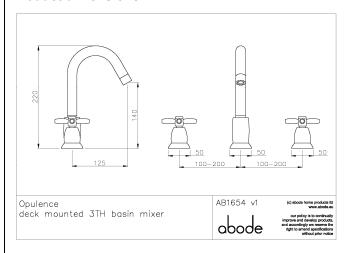

• Overall Height / projection: 220 mm

• Exit reach: 125 mm • Exit height: 140 mm

• Centre distance(s): 100-200 mm


• Base diameter(s): 50 mm

• Product mounted where: Surface

• Recommended hole diameter: 27-35, 22-35, 27-35 mm

• Min. fitting depth required: 0 mm • Max. surface depth: 30 mm

Product flow characteristics:



- Min / Max water pressure: 0.3 / 5.5 bar • Part G mixed flow rate at 3 bar (I/m): 24.9
- Max water temperature: 70° C
- Product flow characteristics: Single flow
- Aerator type: Neoperl honeycomb, laminar, white screen
- Includes output diverter?: N/A
- Control valve type: 1/2" QT CD (8-20)
- Non return valve position: no
- Mesh particle filter size: n/a
- Inlet / outlet size: 1/2" F / 1/2" F
- Inlet type / length: Flexi / 310 mm
- Shower hose type / length: N/a / n/a
- Warranty Summary (Full details available on request):
- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives