

Product features:

- Metal & ABS construction
- Thermostatic valve for safety & comfort
- 2 exit alternate control for output to 2 x shower or 1 x shower & 1 x bath
- Freshly designed contemporary blend
- 5 year limited warranty


Packaged properties:

Box length (mm): 2.95 Box depth(mm): 155
 Box width(mm): 235 Boxed weight (Kg): 2.6

Includes pop up waste?: No

Additional comments:

Product dimensions:

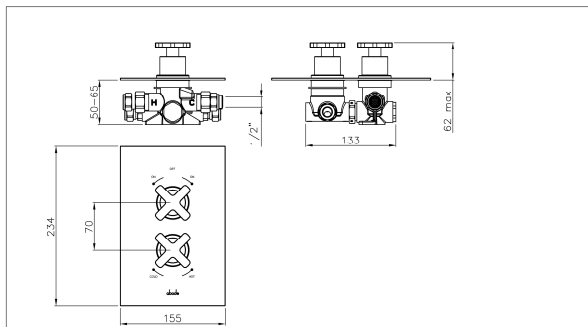

- Product mounted where: Wall
- Recommended hole size: 200 x 170 mm
- Overall Height / projection: 62 mm
- Exit reach: N/A mm
- Exit height: N/A mm
- Base size: 155 x 234 mm

• Inlet centre distance(s):

- Min. fitting depth required: 50-65 mm
- Max. surface depth: N/A mm


Serenitie
thermostatic 2 exit concealed
shower

AB2218 v3



(c) abode home products ltd
www.abode.eu
our policy is to continually improve and develop products, and accordingly we reserve the right to amend specifications without prior notice

Product flow characteristics:

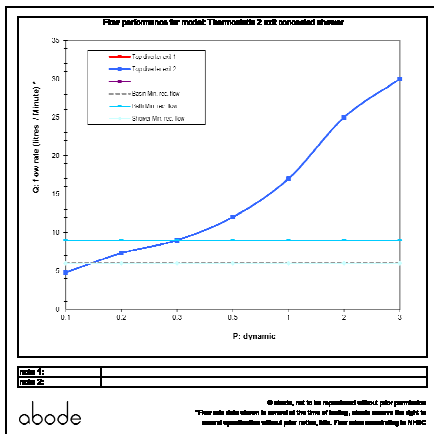

- Min / Max water pressure (bar): 0.30* / 5.00
- Part G max. mixed flow rate at 3 bar (l/m): 30
- Inlet connection type / length: Fixed / mm
- Inlet (plumbing connection) / outlet size: 1/2" M / 1/2" M
- Product flow characteristics: Non return valve(s) supplied or position: h&c inlet
- Aerator type:
- Control valve type: Thermostatic ()
- Includes output diverter?: Yes
- Inlet meshed particle filters included: 0.60 mm
- Shower hose type / length:

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives