



### Product features:

- Metal & ABS construction
- Leading design features requiring high pressure
- Thermostatic valve for safety & comfort
- Single spray pattern showerhead
- Swivel showerhead connector for maximum flexibility

### Packaged properties:


**Box length:** 1260 mm      **Box depth:** 200 mm  
**Box width:** 550 mm      **Boxed weight:** 16.58 kg

**Includes pop up waste?:** No

### Additional comments:

Includes 3mm allen key, ABS handshower


### Product dimensions:

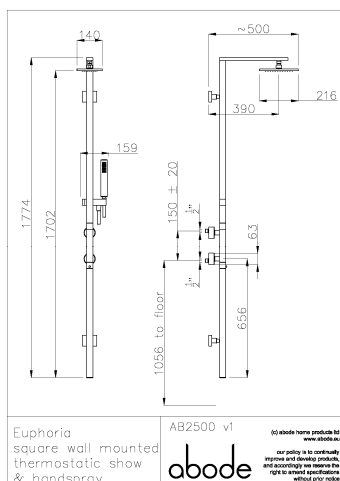

- **Overall Height / projection:** 1774 mm
- **Exit reach:** 390 mm
- **Exit height:** 1702 mm
- **Centre distance(s):** 150 ± 20 mm

- **Base diameter(s):** 63 mm
- **Product mounted where:** Wall
- **Recommended hole diameter:**
- **Min. fitting depth required:** 60 mm
- **Max. surface depth:**

### Product flow characteristics:

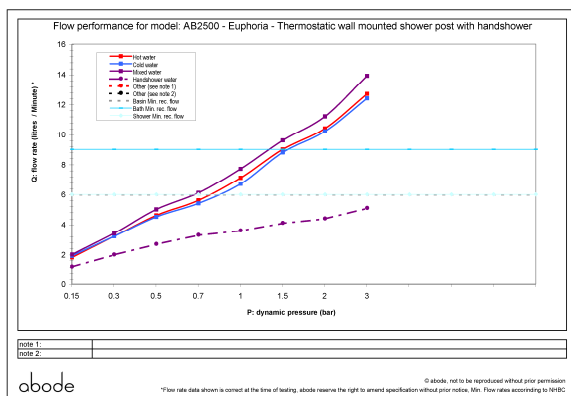

- **Min / Max water pressure:** 1.5 / 5 bar
- **Part G mixed flow rate at 3 bar (l/m):** 13.9
- **Max water temperature:** 70° C
- **Product flow characteristics:**
- **Aerator type:**
- **Includes output diverter?:** Yes
- **Control valve type:** Thermostatic ( )
- **Non return valve position:** h&c inlet & shower snodo
- **Mesh particle filter size:** 0.60 mm
- **Inlet / outlet size:** 1/2" M / 3/4" M
- **Inlet type / length:** Eccentric / mm
- **Shower hose type / length:** Smoothflex / 1.50 m

### Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

### Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives