

**Product features:**

- Metal & ABS construction
- Thermostatic valve for safety & comfort
- Supplied complete with flexible tail pipes for fast simple fitting
- Part G compliant for thermostatic bath fillers
- Factory set maximum output temperature 46°C (adjustable)


**Packaged properties:**

Box length (mm): 445      Box depth (mm): 370  
 Box width (mm): 360      Boxed weight (Kg): 9.4

**Includes pop up waste?:** No

**Additional comments:**


**Product dimensions:**

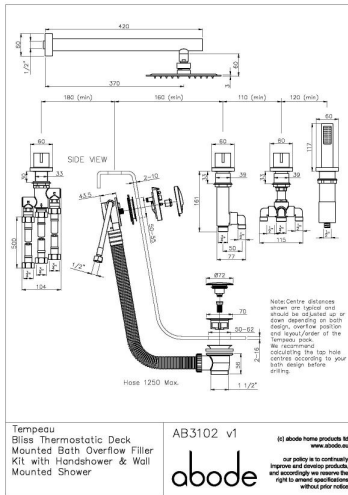

- **Product mounted where:** Deck/Wall
- **Recommended hole size:** 34-40, 50-55, 34-40, 34-40, 42-44 mm
- **Overall Height / projection:** 27 mm
- **Exit reach:** N/A mm
- **Exit height:** N/A mm
- **Base size:** 60, 60, 60, 40, 85 mm
- **Inlet centre distance(s):** 180, 180, 110, 120 mm

- **Min. fitting depth required:** n/a mm
- **Max. surface depth:** 30 mm

**Product flow characteristics:**

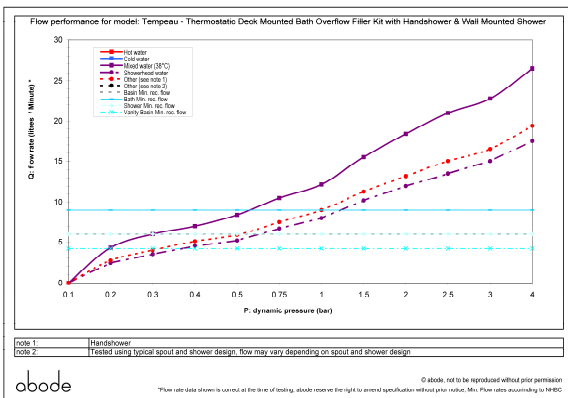

• **Min / Max water pressure (bar):** 0.60\* / 5.50  
 \*Detailed minimum pressure requirements for this product: Bath 0.6, Shower 0.6 (bar)

- **Part G max. mixed flow rate at 3 bar (l/m):** 22.8
- **Inlet connection type / length:** Flexi / 500 mm
- **Inlet (plumbing connection) / outlet size:** 1/2" M & 3/4" M / 1/2" M & 3/4" M
- **Product flow characteristics:** Single Flow  
**Non return valve(s) supplied or position:** H&C Inlet
- **Aerator type:** Flow Straightener
- **Control valve type:** Thermostatic, 3/4 QT CD & 180° Divertor ( )
- **Includes output diverter?:** Yes
- **Inlet meshed particle filters included:** 0.60 mm

**Warranty Summary** (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

**Care instructions:**

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives