



#### Product features:

- Luscious European quality chromium plate finish
- Supplied with fixed 3/4" inlets for maximum stability and flow
- A modern design classic style
- Quarter turn handle action for precise flow control
- Metal & ABS construction


#### Packaged properties:

Box length (mm): 250      Box depth(mm): 190  
Box width(mm): 180      Boxed weight (Kg): 2.3

Includes pop up waste?: No

Additional comments:


#### Product dimensions:

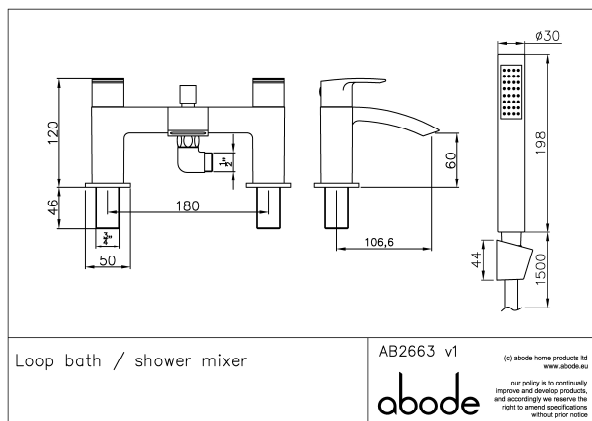

- Product mounted where: Surface
- Recommended hole size: 30-35 mm
- Overall Height / projection: 120 mm
- Exit reach: 107 mm
- Exit height: 60 mm
- Base size: 50 mm
- Inlet centre distance(s): 180 mm

- Min. fitting depth required: N/A mm
- Max. surface depth: 25 mm

#### Product flow characteristics:

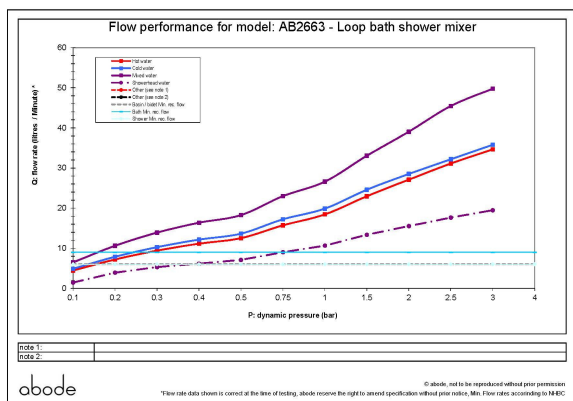

- Min / Max water pressure (bar): 0.30\* / 5.00
- \*Detailed minimum pressure requirements for this product: Bath 0.3, Shower 0.75 (bar)

- Part G max. mixed flow rate at 3 bar (l/m): bath=49.76, shower=19.48

- Inlet connection type / length: Fixed / 46 mm
- Inlet (plumbing connection) / outlet size: 3/4" M /

- Product flow characteristics: Single flow
- Non return valve(s) supplied or position: no

- Aerator type: None

- Control valve type: 3/4" QT CD (3/4 X 46.5 X24)
- Includes output diverter?: Yes

- Inlet meshed particle filters included:

#### Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

#### Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives