

Product Finish: Chrome with black detail

Product code: AT1209
EAN13 barcode: 5060048383706



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Contemporary design with contrasting handle and spout details
- Stylish closed loop flexible spout
- Hidden anti-splash Aerator

Additional information / Parts included:

The installation of this product should respect requirement IRN R090.

Product dimensions:

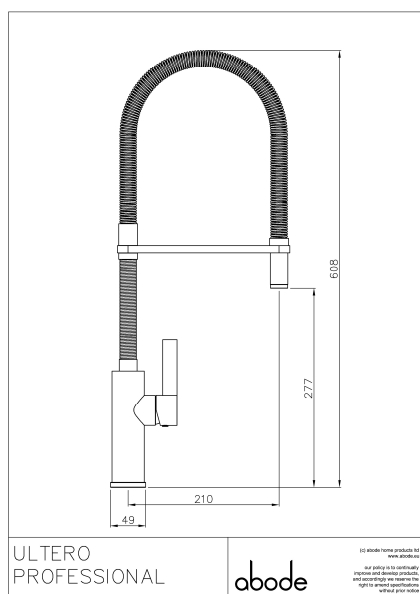

- Overall Height / projection: 608 mm
- Exit reach: 210 mm
- Exit height: 277 mm
- Centre distance(s):

- Base diameter(s): 49 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 48 mm

- Spout diameter: 23 mm
- Spout aerator size: 16f


Packaged properties:

Box length: 635mm Box depth: 75mm

Box width: 275mm Units per outer: 5

Tap only weight: 3.66kg Boxed weight: 4.84kg

Product flow characteristics:

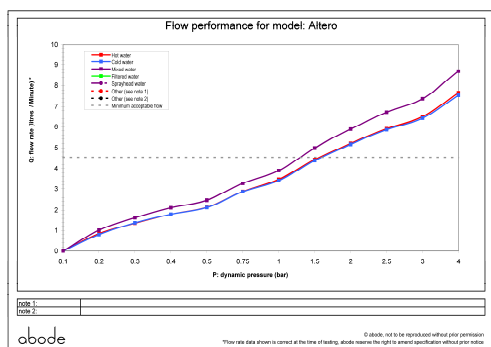

- Min / Max water pressure: 1.50 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 07.38

- Control valve type: Single lever ceramic cartridge
- Product flow characteristics: Single flow
- Non return valve(s): Hot & cold (separate)

- Aerator type: Cache TT
- Accepts revolve / spray areator: No
- Spout connection method: Grub screw

- Tail pipe inlet / outlet size: M10 / 1/2" BSP Female
- Inlet pipe type / length: flexible stainless braided hose / 355 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year