

Product Finish: Brushed Brass

Product code: AT2188  
EAN13 barcode: 5060879990449



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


### Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Urban industrial styling
- Supplied complete with flexible tail pipes for fast simple fitting
- Antisplash spout supplied as standard

### Additional information / Parts included:

2.5mm a/f Allen key included

### Product dimensions:

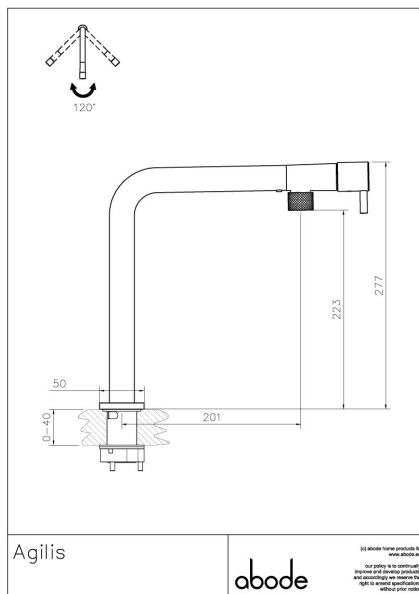

- Overall Height / projection: 277 mm
- Exit reach: 201 mm
- Exit height: 223 mm
- Centre distance(s):


- Base diameter(s): 50 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 40 mm

- Spout diameter: 28 mm
- Spout aerator size: M22 male

### Packaged properties:

- |                         |                      |
|-------------------------|----------------------|
| Box length: 435mm       | Box depth: 70mm      |
| Box width: 340mm        | Units per outer: 5   |
| Tap only weight: 1.31kg | Boxed weight: 2.10kg |

### Product flow characteristics:

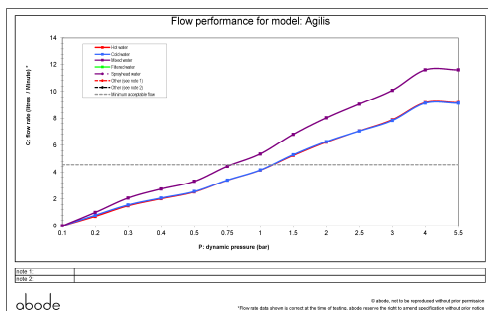

- Min / Max water pressure: 0.75 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 10.09

- Control valve type: Single lever ceramic cartridge
- Product flow characteristics: Single flow
- Non return valve(s): Integral to hot & cold inlets

- Aerator type: Honeycomb Aerator
- Accepts revolve / spray areator: No
- Spout connection method: Not applicable

- Tail pipe inlet / outlet size: M8 / 3/8" Female non captive (c/w 3/8" m x 1/2"F adaptors)

### Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

### Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year