

Product Finish: Brushed Nickel & Beech

Product code: AT2196-F5  
EAN13 barcode: 5060879991149



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

### Product features:

Metal construction throughout with beech detailing

Crystal clear filtered water, easy to change, high quality carbon & resin scale control filter

Supplied complete with flexible tail pipes for fast simple fitting


Cold start handle positioning

filtered water through a dedicated spout pathway

### Additional information / Parts included:

Includes Aquifer (high resin) safelock filter installation pack

### Product dimensions:

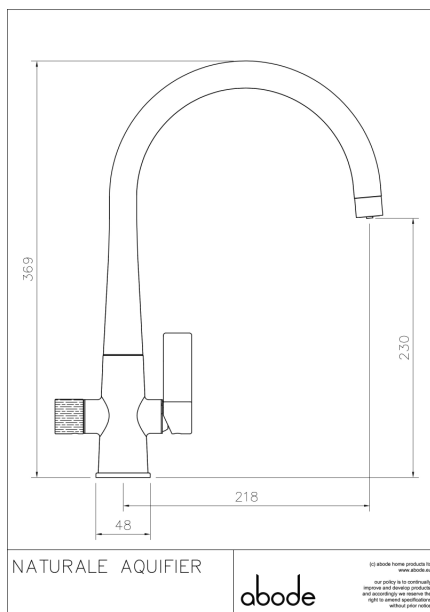

- Overall Height / projection: 369 mm
- Exit reach: 218 mm
- Exit height: 230 mm
- Centre distance(s):


- Base diameter(s): 48 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 70 mm

- Spout diameter: 24 mm
- Spout aerator size: M22x1 M

### Packaged properties:

- Box length: 435mm
- Box depth: 70mm
- Box width: 340mm
- Units per outer: 5
- Tap only weight: TBCKg
- Boxed weight: TBCKg

### Product flow characteristics:

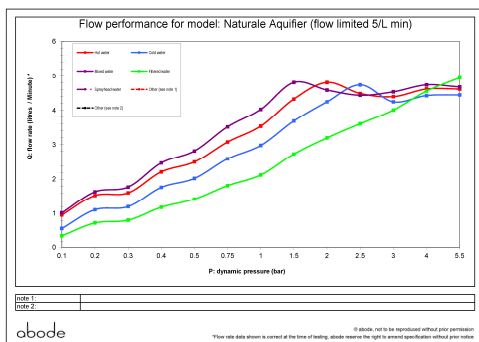

- Min / Max water pressure: 1.25 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 04.54

- Control valve type: Single lever ceramic cartridge, ceramic disc QT
- Product flow characteristics: (C&H / F) dual flow
- Non return valve(s): Integral to cold hose inlet only

- Aerator type: Honeycomb dual flow (limited 5L/M)
- Accepts revolve / spray areator: No
- Spout connection method: Grub screw

- Tail pipe inlet / outlet size: M8 / 1/2" Male (Hot), 1/2" Female (Cold)
- Inlet pipe type / length: flexible stainless braided hose / 360 mm

### Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

### Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year