
abode



Matrix SQGR15

CE K

Product dimensions and installation information: note: Symbol indicates position of acoustic pad on stainless products.

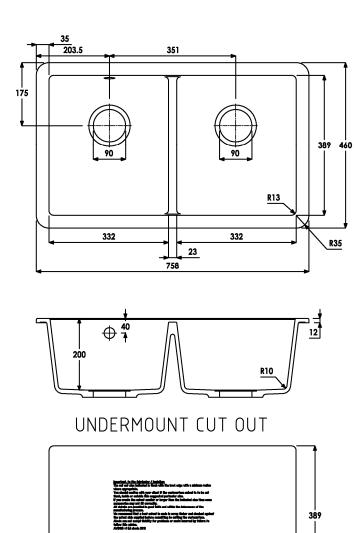

Adittional notes: Repeated release of boiling hot water directly into coloured sinks can in extreme cases cause crazing and even cracking. Therefore we recommend great care is taken not to release the water directly on to the sink surface at full temperature.

687

Overall product size: 758 x 460 x 220, corner radius 35 mm

Taphole(s) detail: None

Wastehole(s) detail (mm): 90 / 90 / N/A

Min. base unit (mm) (refers to space required for bowl, tap and overflow only): fits 800 carcass Min. Recessed fitting width (mm): required (bowl(s), tap and overflow: 705 *Worktop cut out size (mm): 687 x 389, corner radius 13, for .DXF cut files please see our webiste Min. & Max worktop depth or clip depth reach range (mm): 0 - 0

Fitting temple supplied? No, use cut out instructions as supplied

Dishwasher under drainer? Distance from top of worktop to underside of the drainer n/a mm

Bowl details: (sizes in mm unless specified otherwise) Bowl 1 (typically main bowl): Bowl 2

Bowl 2 (typically ½ or ¾ bowl):

R13

Bowl 1 size L x W x D (mm): 332 x 390 x 200Bowl 2 size L x W x D (mm): 332 x 390 x 200Bowl 1 construction: Moulded, 10.00 mmBowl 2 size L x W x D (mm): 332 x 390 x 200Bowl 1 floor radius (mm): 10Bowl 2 construction: Moulded, 10.00 mmBowl 1 Wastehole diameter (mm): 90Bowl 2 floor radius (mm): 10Bowl 1 overflow: Cirlcular, 30mm diameterBowl 2 wastehole diameter (mm): 90Bowl 1 texture: Matt texturedBowl 2 texture: Matt texturedBowl 1 apx. volume (litres): 16.80Bowl 2 apx. volume (litres): 21.50

Bowl 3:

Bowl 3 size L x W x D (mm): N/A x N/A x N/A Bowl 3 construction: N/A, N/A mm Bowl 3 floor radius (mm): N/A Bowl 3 Wastehole diameter (mm): N/A Bowl 3 overflow: N/A Bowl 3 texture: N/A Bowl 3 apx. volume (litres): N/A



CE

*Important, fabricator / installer notes for

aligned with outside edge of the bowl top radius (similar to the example below).

You should confirm with your client if the worksurface cutout is to be cut flush, inside or outside this suggested

If you create the cutout smaller

All details are provided in good faith but do not include the tolerances of the material or

We request that a test cutout is made in scrap timber and checked against the actual sink to be installed before

> committing to cutting the final worksurface. Abode can not accept liability for problems or

costs incurred by failure to

ceramic fireclay products are

to the nature of this natural

CAD cutout files can be

www.abodedesigns.co.uk

downloaded from

subject to wider tolerances due

material and the firing process.

follow this request.

Note: the dimensions on

manufacturing process.

or larger than the indicated size then the fit of the accessories may be affected and should be physically

checked.

perimeter shape & size.

undermount & Flushmount sinks: The cut out size indicated is