
# abode

## Syncronist 1.25 Bowl & drainer





Product dimensions and installation information: note: 🕑 symbol indicates position of acoustic pad on stainless products.

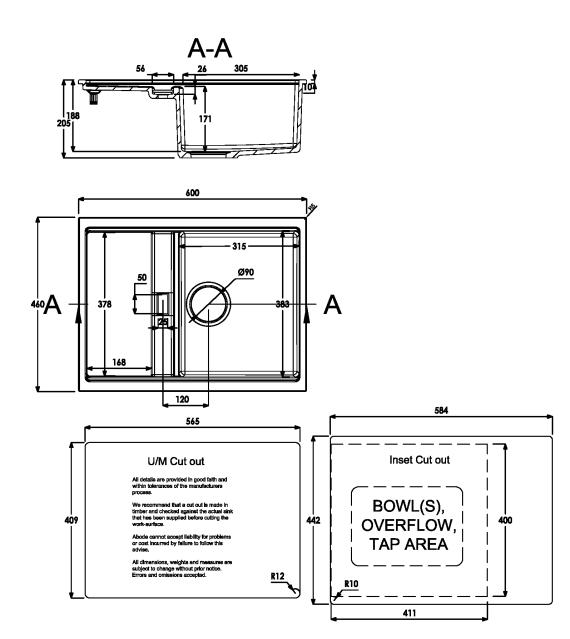

Aditional notes: Repeated release of boiling hot water directly into coloured sinks can in extreme cases cause crazing and even cracking. Therefore we recommend great care is taken not to release the water directly on to the sink surface at full temperature.

Overall product size: 600 x 460 x 210, corner radius 5 mm

#### Taphole(s) detail: None

Wastehole(s) detail (mm): 90 / N/A / N/A

Min. base unit (mm) (refers to space required for bowl, tap and overflow only): fits 450 (inset) 800 (undermount) carcass Min. Recessed fitting width (mm): required (bowl(s), tap and overflow:

\*Worktop cut out size (mm): 584 x 442, corner radius 12, for .DXF cut files please see our webiste

Min. & Max worktop depth or clip depth reach range (mm): 35 - 50

Fitting temple supplied?

Dishwasher under drainer? Distance from top of worktop to underside of the drainer 10 mm

#### Bowl details: (sizes in mm unless specified otherwise) Bowl 1 (typically main bowl): Bowl 2

### Bowl 2 (typically ½ or ¾ bowl): Bowl 2 size L x W x D (mm): 383 x 56 x 21

Bowl 2 construction: Moulded, 10.00 mm

Bowl 2 Wastehole diameter (mm): N/A

Bowl 2 overflow: Rectangular flush

Bowl 2 floor radius (mm): 6

Bowl 2 texture: Matt textured

Bowl 2 apx. volume (litres): 0.30

Bowl 1 size L x W x D (mm): 315 x 383 x 176 Bowl 1 construction: Moulded, 10.00 mm Bowl 1 floor radius (mm): 10 Bowl 1 Wastehole diameter (mm): 90 Bowl 1 overflow: Rectangular horizontal Bowl 1 texture: Matt textured Bowl 1 apx. volume (litres): 18.80

#### Bowl 3:

Bowl 3 size L x W x D (mm): N/A x N/A x N/A Bowl 3 construction: N/A, N/A mm Bowl 3 floor radius (mm): N/A Bowl 3 Wastehole diameter (mm): N/A Bowl 3 overflow: N/A Bowl 3 texture: N/A Bowl 3 apx. volume (litres): N/A



\*Important, fabricator / installer notes for undermount & Flushmount sinks: The cut out size indicated is aligned with outside edge of the bowl top radius (similar to the example below).

You should confirm with your client if the worksurface cutout

If you create the cutout smaller or larger than the indicated size then the fit of the

accessories may be affected

All details are provided in good faith but do not include the

We request that a test cutout is made in scrap timber and checked against the actual

sink to be installed before committing to cutting the

costs incurred by failure to

ceramic fireclay products are

to the nature of this natural material and the firing process.

CAD cutout files can be

www.abodedesigns.co.uk

downloaded from

subject to wider tolerances due

final worksurface. Abode can not accept liability for problems or

follow this request.

Note: the dimensions on

tolerances of the material or

manufacturing process.

and should be physically

checked.

General:

is to be cut flush, inside or outside this suggested perimeter shape & size.