

Product features:

- Metal & ABS construction
- Thermostatic valve for safety & comfort
- Supplied complete with flexible tail pipes for fast simple fitting
- Part G compliant for thermostatic bath fillers
- Factory set maximum output temperature 46°C (adjustable)


Packaged properties:

Box length (mm): 445 Box depth(mm): 370
 Box width(mm): 360 Boxed weight (Kg): 6.7

Includes pop up waste?: No

Additional comments:

Product dimensions:

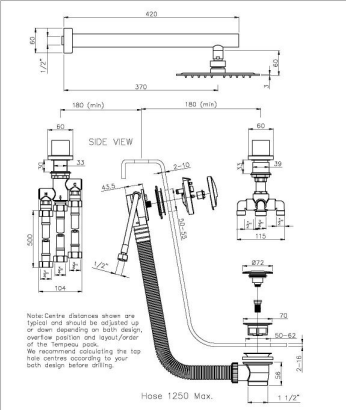

Note: Centre distance shown are typical and should be adjusted up or down depending on bath design, overflow position and spout/order of the temperate guide. We recommend consulting the top hole centres according to your bath design before ordering.

Hose 1250 Max.

Tempeau Début Thermostatic 2 Hole Bath Overflow Filler Kit & Wall Mounted Shower


AB3085 v1

(c) abode home products ltd www.abode.co.uk

our policy is to continually improve our products, and accordingly we reserve the right to amend specifications without prior notice.

- **Product mounted where:** Deck/Wall
- **Recommended hole size:** 34-40, 50-55, 34-40 mm
- **Overall Height / projection:** 27 mm
- **Exit reach:** N/A mm
- **Exit height:** N/A mm
- **Base size:** 60, 60, 85 mm
- **Inlet centre distance(s):** 180, 180 mm
- **Min. fitting depth required:** n/a mm
- **Max. surface depth:** 30 mm

Product flow characteristics:

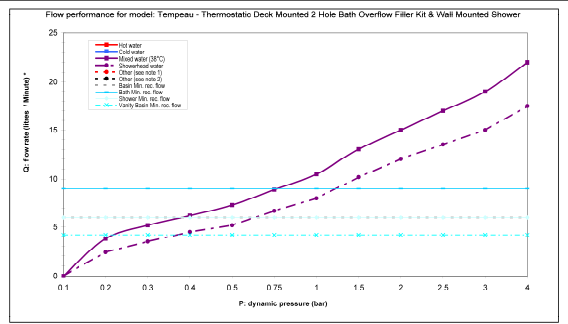

Flow performance for model: Tempeau - Thermostatic Deck Mounted 2 Hole Bath Overflow Filler Kit & Wall Mounted Shower

Q: flow rate (l/min) *
 P: dynamic pressure (bar)

Legend:
 - Hot water
 - Shower
 - Mixed Water (35°C)
 - Showerhead
 - Other (see note 1)
 - Other (see note 2)
 - Bath fill, hot flow
 - Shower fill, hot flow
 - Vanity Basin fill, hot flow

note 1: Tested using typical spout and shower design. flow may vary depending on spout and shower design.
 note 2: *Flow rate data shown is correct at the time of testing, abode reserves the right to amend specifications without prior notice. Min. Flow rates according to H48C

- **Min / Max water pressure (bar):** 0.75* / 5.50
 *Detailed minimum pressure requirements for this product: Bath 0.75, Shower 0.6 (bar)
- **Part G max. mixed flow rate at 3 bar (l/m):** 19
- **Inlet connection type / length:** Flexi / 500 mm
- **Inlet (plumbing connection) / outlet size:** 1/2" M & 3/4" M / 1/2" M & 3/4" M
- **Product flow characteristics:** Single Flow
Non return valve(s) supplied or position: H&C Inlet
- **Aerator type:** Flow Straightener
- **Control valve type:** Thermostatic & 180° Divertor ()
- **Includes output diverter?:** Yes
- **Inlet meshed particle filters included:** 0.60 mm

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives